
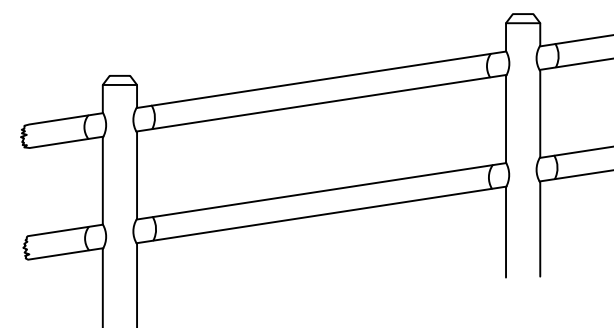


CONSTRUCTION NOTES

1. *Posts and rails must be sound and well seasoned. They must be free of sap rot. Butt rot must not occupy more than 5% of the area of the butt. Excessive checking is not necessary.*
2. *Posts and rails must be essentially free from kinks and exaggerated twist. They must be stripped of bark. Knots must be trimmed flush with adjacent areas. Posts and rails may be prefabricated or cut and shaped on site.*
3. *Posts must be cedar or another species that has been pressure treated with a wood preservative.*
4. *Post holes must be dug 6" greater in diameter than the post at ground level. Backfill around posts must be tamped in lifts (loose) of 6 inches or less.*
5. *Rails must be fastened in the post openings with 30 penny hot dipped galvanized spikes. Drive these carefully to avoid splitting.*

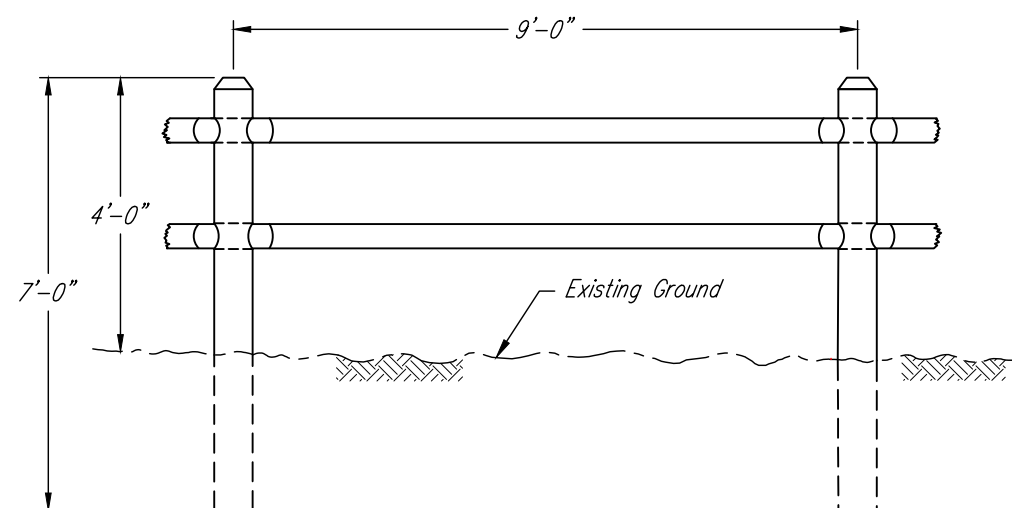

ISOMETRIC VIEW